



Model: 6/3400

### SPECIFICATIONS

Remote reading, nickel-plated copper capillary, vapour pressure actuated temperature gauge. Fast response rates.

- CASE** Glass filled Nylon for wall mount option, aluminium for panel mount option
- BEZEL** Stainless steel
- CAPILLARY** 2 mm OD nickel plated copper
- BULB** Nickel plated copper, 12.7 mm OD x 90 mm length (minimum)
- DIAL** Aluminium, black on white
- POINTER** Black coated aluminium

### FEATURES

- SINGLE SCALE** °C
  - ACCURACY** ±1.5 % of full scale deflection in accordance with BS 1041-2.1:1985.
  - CAPILLARY** Standard Length is 2 m, but lengths up to 30 m are available.
- Vapour pressure thermometer scales are logarithmic. The ideal working temperature is between 10 and 2 o'clock on the dial.

### TEMPERATURE RANGES


Temperature Ranges °C	Effective Temperature Range °C
-40/15	-30/15
-30/30	-30/30
-20/60	-20/60
10/80	25/80
40/110	50/100
40/150	50/150
100/200	100/200

OPTIONS	Wall mount or panel mount
---------	---------------------------

### CONNECTIONS

Pockets (thermowells) can be provided in either nickel plated brass or 316 stainless steel, ½ " BSP thread with nut and rubber insert to hold capillary.

### DIMENSIONS (mm)

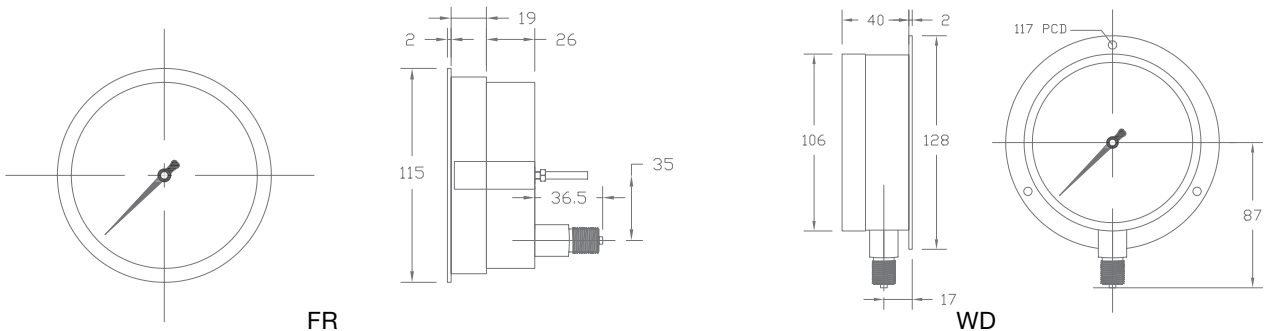

### ORDERING GUIDE

Model	6/3400	-30/30	6M	12.7/90	W	SS
Range	-30/30				Thermowell (SS) Stainless steel (CPB) Nickel plated brass (O) Other - Specify	
Capillary Length			12.7/90			
Bulb Dimensions			12.7/90 mm		Mounting (WD - Wall mount (FR - Panel mount)	

Manufactured in New Zealand by  
**TEL THERM INSTRUMENTS LTD.**  
 5/343 Church St,  
 Onehunga  
 Auckland 1061  
 P.O. Box 12-171,  
 Penrose  
 Auckland 1642  
**Ph: +64 9 633 0040**  
**Fax: +64 9 633 0012**  
**Email: sales@teltherm.co.nz**  
**www.teltherm.co.nz**